

# X3 System™

## Cost-Effective, Modular Vending




The CribMaster X3 System is a customizable, modular vending solution that allows secure dispensing anywhere in your operation. The flexibility of the system improves workflow by allowing authorized users easy access to their high-use inventory within reach at the point of use. Each helix or carousel module can be vertically stacked in a small footprint to create satellite vending of your tool crib inventory. The inventory management software behind the system provides the critical data needed to accurately manage any type of indirect material.

- Cost-effective indirect material management
- Expandable modular design for maximum flexibility
- Easy access to high-volume inventory
- Combines helix and carousel modules in a single footprint




## X3 System Configurations


The X3 System comes in main and auxiliary units, same as their full-sized ToolBox and ProStock counterparts. This expandable cost-effective solution allows you to choose the modules and configurations to best meet your needs.



ToolBox Module\*



ProStock Module\*



Base\*\*

## Suggested Inventory Types

The X3 modules are tailored to dispense small PPE and cutting tools such as:

- Single or multi-pack inserts
- Batteries
- Filters
- Tape
- Fasteners
- Welding tips

\*Optional leveling feet available.

\*\*Base is available with or without a cabinet door.

# X3 Module Configurations

## ToolBox Module: Single Helix Configuration

Helix Count	5	7	8	9	10	12	15	18	24	32
Slot Depth (in)*	4.04	2.9	2.51	2.25	2.02	1.66	1.3	1.05	0.75	0.53
Slot Depth (cm)*	10.26	7.37	6.38	5.72	5.13	4.22	3.3	2.67	1.91	1.35

Each single helix shelf can hold 10 SKUs in a 2.5 in / 6.35 cm opening.

Shelf height is 5.5 to 7.25 in / 13.97 to 28.42 cm. Maximum shelf capacity is 100 lbs / 45.36 kg.

## ProStock Module: Usable Carousel Bin Dimensions

Section Divide	1	2	3	4	5	6	7	8	9	10
Front Width (in)	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	12
Front Width (cm)	3.05	6.1	9.14	12.19	15.24	18.29	21.34	24.38	27.43	30.48
Back Width (in)	0	0.19	0.38	0.56	0.75	0.94	1.13	1.32	1.51	1.7
Back Width (cm)	0	0.48	0.97	1.42	1.9	2.39	2.87	3.35	3.84	4.32

Each section divide depth is 9.6 in / 24.38 cm and height is 4.75 in / 12.07 cm.

Carousels are field-configurable. Maximum carousel capacity is 35 lbs / 15.88 kg.

## X3 System Specs

### Module Exterior Dimensions

Height	16.5 in	41.91 cm
Width	30 in	76.2 cm
Depth	30 in	76.2 cm

### Base Exterior Dimensions

Height	17 in	43.18 cm
Width	30 in	76.2 cm
Depth	30 in	76.2 cm

### Vending Drawer Dimensions

Height	2.75 in	6.99 cm
Width	26.5 in	67.31 cm
Depth	4.25 in	10.8 cm

### Weight

ToolBox Module	125 lbs	57 kg
ProStock Module	110 lbs	50 kg

### Power Requirements

Amps	2	1 (EU)
Voltage	120	230 (EU)

### Operating Environment

Temperature	32°F to 95°F	0°C to 35°C
Humidity	20% to 85% (no condensation)	

### Technical Info

CE Compliant


Windows OS

## Accessories

- Side-attaching shelf to hold ATR, prox stand, scanner, or other items under 10 lbs / 4.54 kg
- Vertical partition or flip bar pusher to vend narrow items such as end mills, insert boxes, and pens
- Riser platform to vend short items such as battery packs
- Auger helix for vending small items such as single cutting tool inserts and welding tips
- V-channel mini helix to vend small narrow items such as single cutting tool insert boxes and earplugs

### Mini Helix Configuration

Helix Count	10	20	32
Slot Depth (in)*	1.87	0.96	0.53
Slot Depth (cm)*	4.75	2.44	1.35

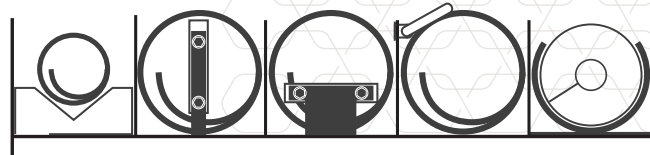

V-channel & Mini Helix

Vertical Partition

Riser Platform

Flip Bar Pusher

Auger



**CRIBMASTER**

CribMaster Global Headquarters  
1955 West Oak Circle  
Marietta, GA 30062

Toll Free // 1.877.960.0602

[www.cribmaster.com](http://www.cribmaster.com)

\*Not the actual size of opening. Slot depth is measured from the peak of one spiral pitch to the next.